


Quick start - editing the channel list


- (1) Search channels using the receiver menu or you can upload one off factory channel list and add missing channels.
- (2) Then plug the USB stick. Go to the update via USB. As a kind of update, select Dump. Then select Start to save the file with all the software on a USB memory stick.



- (3) Go to the computer and run ArivaEditor. Select **File -> Open** to open the saved file.

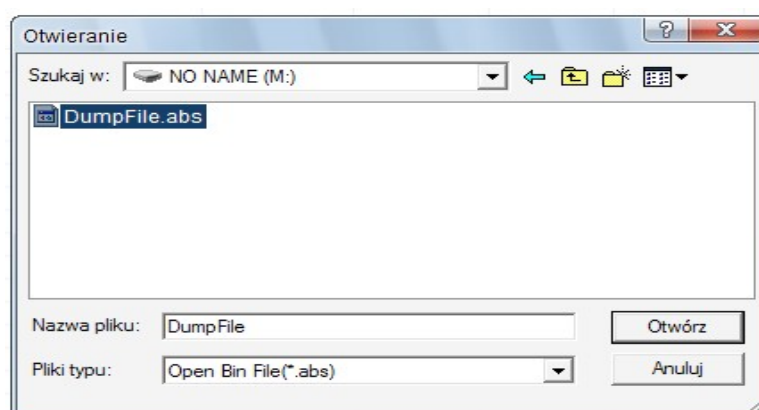


- (4) Then select the **userdb** - ie the user's database, which is a list of saved channels.

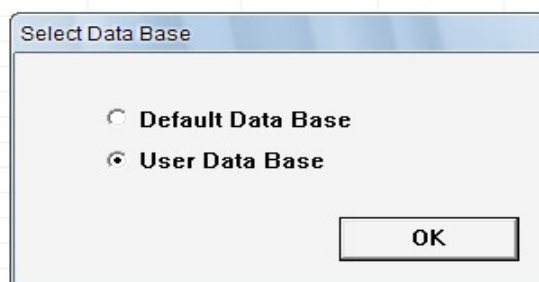


Quick start - editing the channel list

- (5) Click on **All Services** to view a list of channels. You can now change the order, edit, add and delete channels.

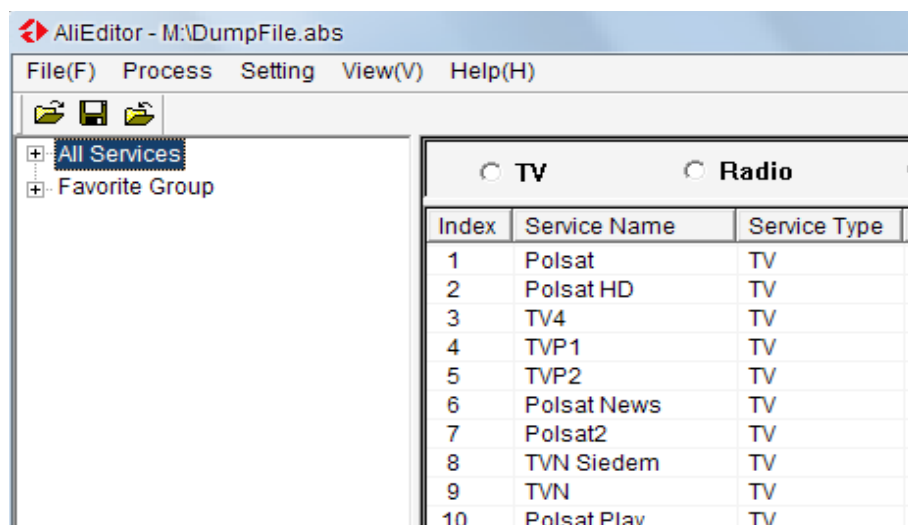

- (6) When you finish editing, select **File -> Export** and save a new file with *.abs extension.

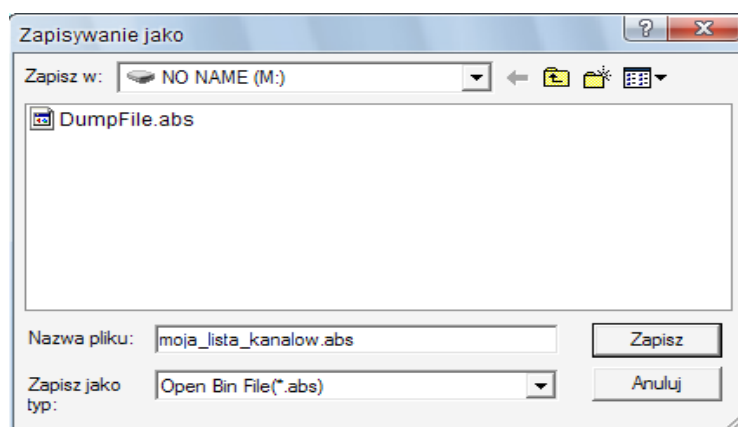

- (7) To upload a list of channels to your receiver, go to update via USB. As a upgrade mode, select **userdb**. Next select the previously saved file and press start.

